




Electric four wheel counterbalance forklift truck


EFG MC 316k/316/320/325k/325/330

Lift height: 3000-6500 mm / Load capacity: 1600-3000 kg


EFG MC 316k/316/320/325k/325/330

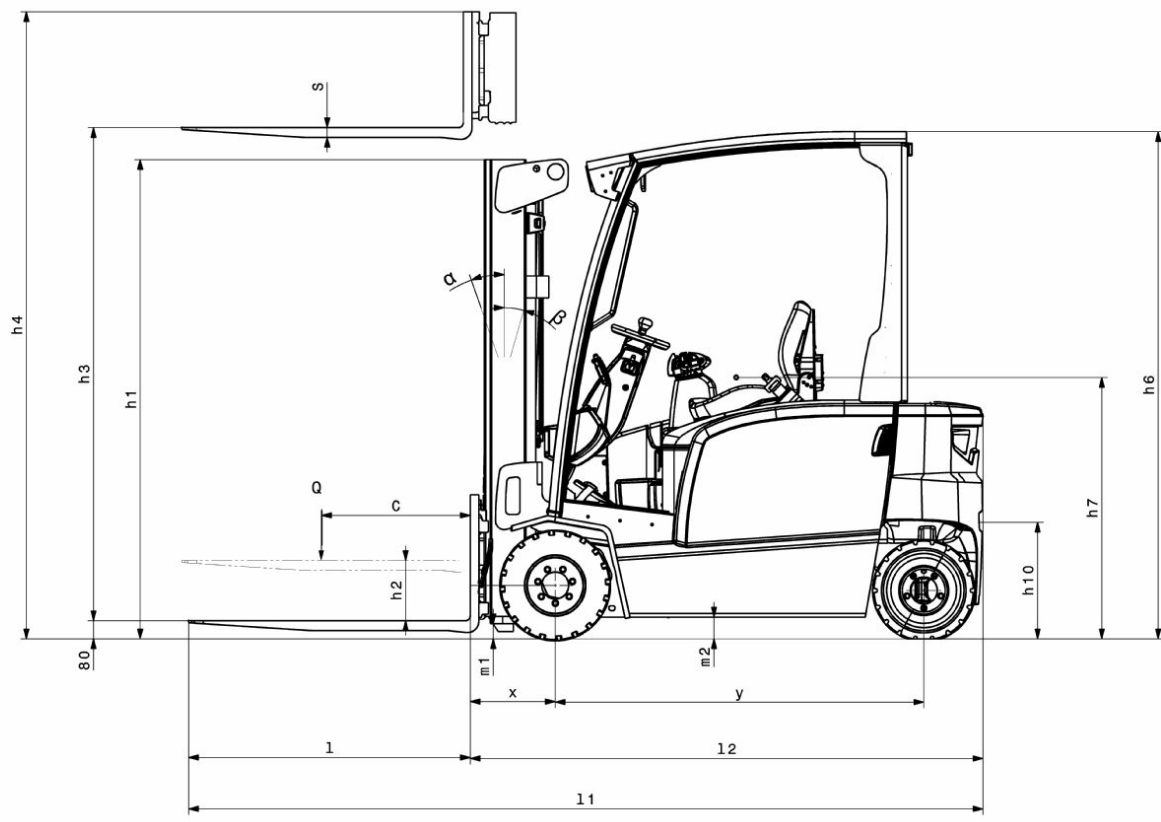


EFG MC 316k/316/320/325k/325/330

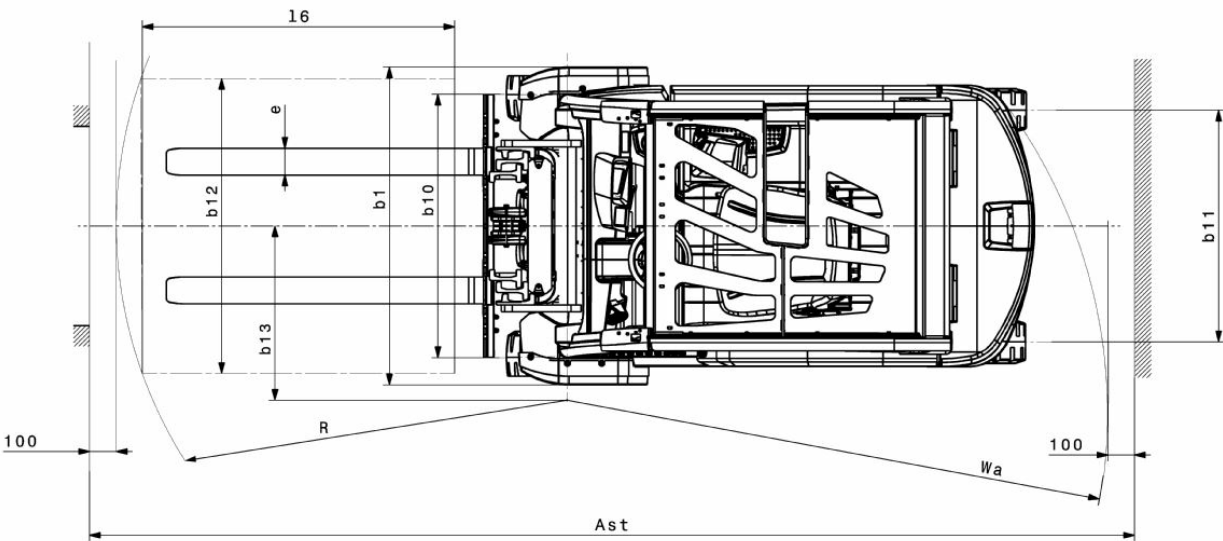

EFG MC 316k/316/320/325k/325/330

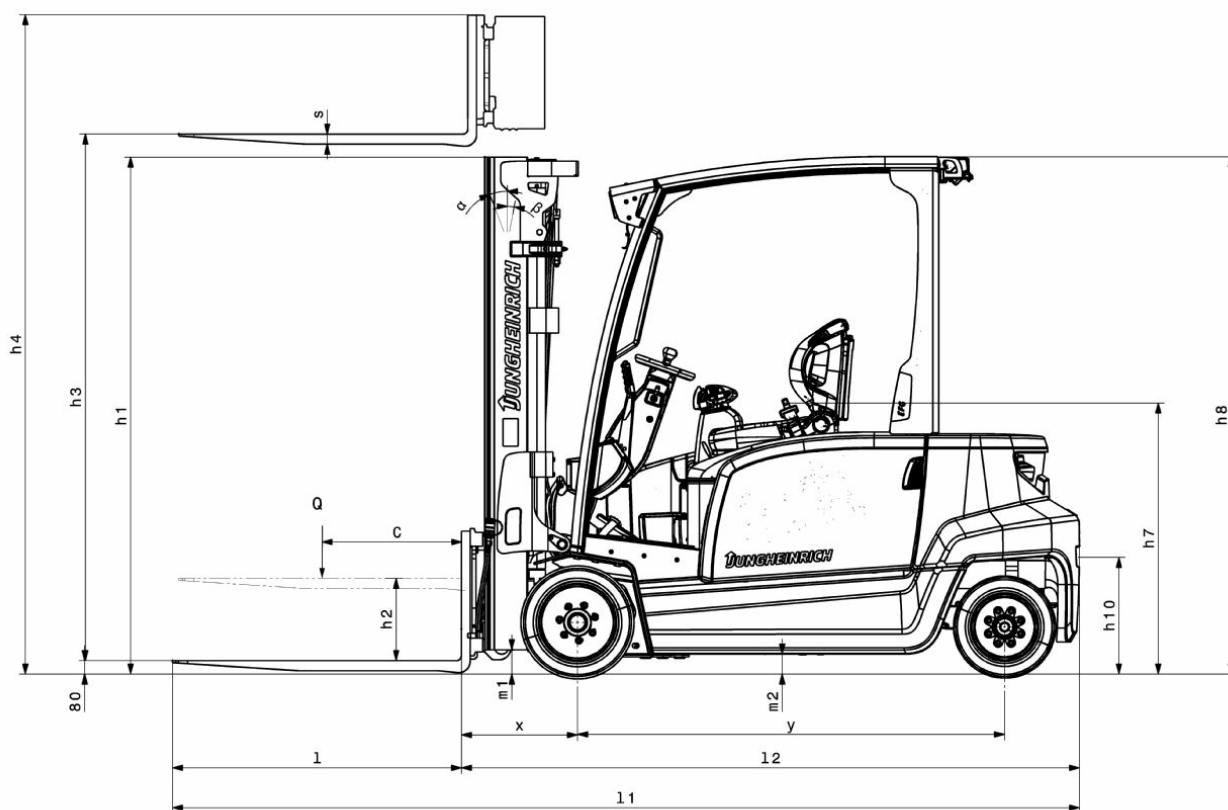

EFG MC 316k/316/320/325k/325/330

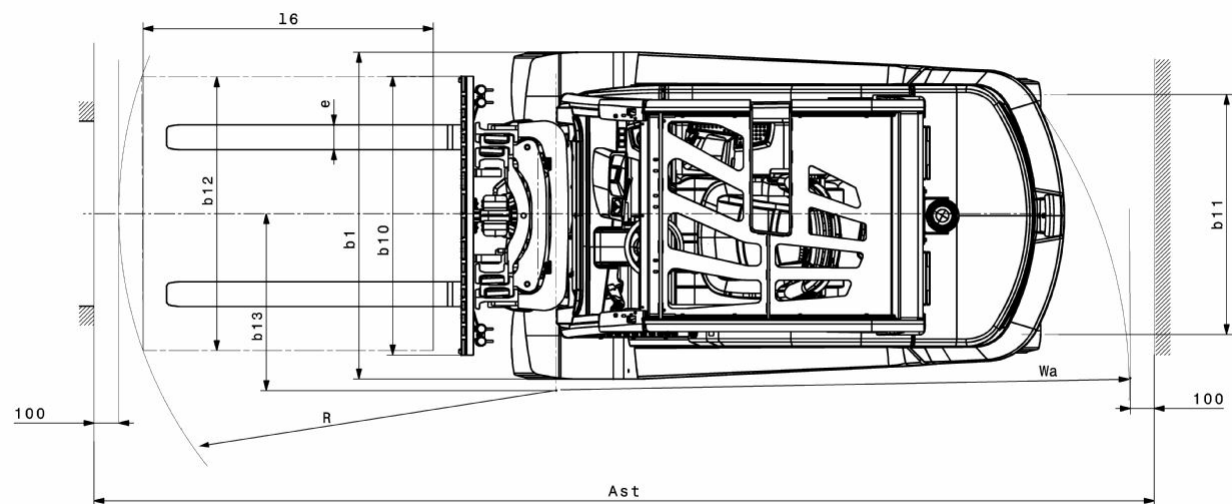

EFG MC 316k/316/320/325k/325/330

EFG MC 316k, EFG MC 316	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)	Forward/backward tilt of mast
Mast tilt / Duplex mast ZT / hot-rolled	3000 mm	2000 mm	150 mm	3555 mm	7 / 5 °
	3300 mm	2150 mm	150 mm	3855 mm	7 / 5 °
	3600 mm	2300 mm	150 mm	4155 mm	7 / 5 °
	4000 mm	2500 mm	150 mm	4555 mm	7 / 5 °
	4500 mm	2800 mm	150 mm	5055 mm	7 / 5 °
	5000 mm	3050 mm	150 mm	5555 mm	7 / 5 °
Mast tilt / Duplex mast ZZ / hot-rolled	3300 mm	2105 mm	1470 mm	3855 mm	7 / 5 °
	3600 mm	2255 mm	1620 mm	4155 mm	7 / 5 °
	4000 mm	2455 mm	1820 mm	4555 mm	7 / 5 °
Mast tilt / Triplex mast DZ / hot-rolled	4500 mm	2005 mm	1360 mm	5055 mm	7 / 5 °
	4800 mm	2105 mm	1460 mm	5355 mm	7 / 5 °
	5000 mm	2180 mm	1530 mm	5555 mm	7 / 5 °
	5500 mm	2355 mm	1710 mm	6055 mm	7 / 5 °
	6000 mm	2555 mm	1910 mm	6555 mm	7 / 5 °
	6500 mm	2805 mm	2160 mm	7055 mm	7 / 5 °
EFG MC 320	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)	Forward/backward tilt of mast
Mast tilt / Duplex mast ZT / hot-rolled	3000 mm	2000 mm	150 mm	3605 mm	7 / 5 °
	3300 mm	2150 mm	150 mm	3905 mm	7 / 5 °
	3600 mm	2300 mm	150 mm	4205 mm	7 / 5 °
	4000 mm	2500 mm	150 mm	4605 mm	7 / 5 °
	4500 mm	2800 mm	150 mm	5105 mm	7 / 5 °
	5000 mm	3050 mm	150 mm	5605 mm	7 / 5 °
Mast tilt / Duplex mast ZZ / hot-rolled	3300 mm	2105 mm	1470 mm	3935 mm	7 / 5 °
	3600 mm	2255 mm	1620 mm	4235 mm	7 / 5 °
	4000 mm	2455 mm	1820 mm	4635 mm	7 / 5 °
Mast tilt / Triplex mast DZ / hot-rolled	4500 mm	2005 mm	1360 mm	5135 mm	7 / 5 °
	4800 mm	2105 mm	1460 mm	5435 mm	7 / 5 °
	5000 mm	2180 mm	1530 mm	5635 mm	7 / 5 °
	5500 mm	2355 mm	1710 mm	6135 mm	7 / 5 °
	6000 mm	2555 mm	1910 mm	6635 mm	7 / 5 °
	6500 mm	2805 mm	2160 mm	7135 mm	7 / 5 °
EFG MC 325k, EFG MC 325	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)	Forward/backward tilt of mast
Mast tilt / Duplex mast ZT / hot-rolled	3100 mm	2200 mm	150 mm	3700 mm	7 / 5 °
	3300 mm	2300 mm	150 mm	3900 mm	7 / 5 °
	3500 mm	2400 mm	150 mm	4100 mm	7 / 5 °
	3700 mm	2500 mm	150 mm	4300 mm	7 / 5 °
	4000 mm	2650 mm	150 mm	4600 mm	7 / 5 °
	4500 mm	2950 mm	150 mm	5100 mm	7 / 5 °
Mast tilt / Duplex mast ZZ / hot-rolled	3100 mm	2160 mm	1600 mm	3700 mm	7 / 5 °
	3300 mm	2260 mm	1700 mm	3900 mm	7 / 5 °
	3500 mm	2360 mm	1800 mm	4100 mm	7 / 5 °
	4000 mm	2610 mm	2060 mm	4600 mm	7 / 5 °
Mast tilt / Triplex mast DZ / hot-rolled	4400 mm	2060 mm	1500 mm	5000 mm	7 / 5 °
	4700 mm	2160 mm	1600 mm	5300 mm	7 / 5 °

	5000 mm	2260 mm	1700 mm	5600 mm	7 / 5 °
EFG MC 330	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)	Forward/backward tilt of mast
Mast tilt / Duplex mast ZT / hot-rolled	3100 mm	2200 mm	150 mm	3850 mm	7 / 5 °
	3300 mm	2300 mm	150 mm	4050 mm	7 / 5 °
	3500 mm	2400 mm	150 mm	4250 mm	7 / 5 °
	3700 mm	2500 mm	150 mm	4450 mm	7 / 5 °
	4000 mm	2650 mm	150 mm	4750 mm	7 / 5 °
	4500 mm	2950 mm	150 mm	5250 mm	7 / 5 °
Mast tilt / Duplex mast ZZ / hot-rolled	3100 mm	2160 mm	1440 mm	3850 mm	7 / 5 °
	3300 mm	2260 mm	1540 mm	4050 mm	7 / 5 °
	3500 mm	2360 mm	1640 mm	4250 mm	7 / 5 °
	4000 mm	2610 mm	1900 mm	4750 mm	7 / 5 °
Mast tilt / Triplex mast DZ / hot-rolled	4400 mm	2060 mm	1340 mm	5150 mm	7 / 5 °
	4700 mm	2160 mm	1440 mm	5450 mm	7 / 5 °
	5000 mm	2260 mm	1540 mm	5750 mm	7 / 5 °

VDI table

Stand-on: 03/2024

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		EFG MC 316K	EFG MC 316	EFG MC 320	EFG MC 325k	EFG MC 325	EFG MC 330	
	1.3	Drive		Electric						
	1.4	Operation		Seat						
	1.5	Load capacity/load	Q kg	1600		2000	2500		3000	
	1.6	Load centre distance	c mm	500						
	1.8	Load distance, centre of drive axle to fork	x mm	352			467		472	
	1.9	Wheelbase	y mm	1398	1506		1453	1561	1700	
	Weights	2.1.1	Service weight (incl. battery)	kg	3261	3437	3768	4397	4502	4783
2.2		Axle load laden front/rear	kg	4094 / 767	3989 / 1048	4971 / 797	6207 / 690	6302 / 700	7004 / 779	
2.3		Axle load unladen front/rear	kg	1596 / 1665	1699 / 1738	1880 / 1888	1855 / 2542	1981 / 2521	2248 / 2535	
Wheels/suspension system	3.1	Tyres		Super-elastic (SE)						
	3.2	Tyre size, front		18x7-8		200/50-10	18 x 9 - 12		TANDEM, 18 x 5 & 6 - 12(1/8)	
	3.3	Tyre size, rear		16x6-8			16 x 6 -10 (1/2)		16 x 7 -10 (1/2)	
	3.5	Wheels, number front/back (x=driven)		2x/2			2x / 2			
	3.6	Tread width, front	b10 mm	904		924	938		1013	
	3.7	Tread width, rear	b11 mm	870			864		995	
Basic dimensions	4.1	Forward/backward tilt of mast	a/β °	7 / 5						
	4.2	Retracted mast height (h1)	h1 mm	2000			2200			
	4.2.1	total height	h15 mm	2080			2200			
	4.3	Free lift (h2)	h2 mm	150						
	4.4	Lift (h3)	h3 mm	3000			3100			
	4.5	Extended mast height (h4)	h4 mm	3555		3605	3700		3850	
	4.7	Height of overhead guard (cab)	h6 mm	2080						
	4.8	Seat height/stand height	h7 mm	1030						
	4.12	Coupling height	h10 mm	475						
	4.19	total length	l1 mm	2988	3096		3213	3321	3469	
	4.20	Length including fork shank	l2 mm	1988	2096		2213	2321	2469	
	4.21.1	total width	b1 mm	1060		1120	1170		1313	
	4.22	Fork dimensions	s/ e/l mm	40 x 100 x 1000						45 x 125 x 1000
	4.23	Fork carriage connection class		2A						3A
	4.24	Fork carriage width	b3 mm	980			1120			
	4.31	Ground clearance laden under mast	m1 mm	97						
	4.32	Ground clearance centre of wheelbase	m2 mm	83			88			
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	3405	3513		3608	3727	3897	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	3604	3712		3807	3927	4097	
	Performance data	4.35	Turning radius	Wa mm	1852		1960		1940	2060
4.36		Smallest pivot point distance	b13 mm	542	562		542	600	667	
5.1		Travel speed laden/unladen (Efficiency drivePLUS)	km/h	16 / 16 19 / 19		16 / 16 18.5 / 19		17 / 18 17 / 18		

	5.2	Lift speed laden/unladen (Efficiency liftPLUS)	m/s	0.43 / 0.66 0.57 / 0.82	0.38 / 0.52 0.5 / 0.68	0.4 / 0.5 0.4 / 0.5	0.3 / 0.32 0.3 / 0.32
	5.3	Lowering speed laden/unladen	m/s	0.55 / 0.55			
	5.5	Drawbar pull laden	N	2100	1900	2400	2300
	5.6	Max. drawbar pull laden/unladen	N	13500 / 13500		14000 / 8700	13800 / 14600
	5.7	Gradeability laden/unladen	%	12 / 20		9 / 13	8 / 12
	5.8	Max. gradeability laden/unladen	%	24 / 35	22 / 35	16 / 22	15 / 22
	5.9	Acceleration time laden/unladen (Efficiency drivePLUS)	s	5.2 / 4.9 5.2 / 4.8	5 / 4.5 4.8 / 4.2	5.6 / 5 5.6 / 5	5.7 / 5.2 5.7 / 5.2
	5.10	Service brake		mechanical/hydraulic			
E-motor/Electronics	6.1	Drive motor, performance S2 60 min	kW	4.6			
	6.1.1	2. Drive motor, performance S2 60 min	kW	4.6			
	6.2	Lift motor, performance with S3	kW	15.5			
	6.3	Battery according to DIN 43531/35/36		DIN 43531 A			
	6.4	Battery voltage/nominal capacity	V / Ah	48 / 625	48 / 750	48 / 625	48 / 750
	6.5	Battery weight	kg	856	1013	856	1013
	6.6.1	Energy consumption according to EN cycle (Efficiency PLUS)	kWh/h	4.8 4.71	4.94 4.94	5.77 5.77	6.88 6.88
	6.6.2	CO2 equivalent as per EN 16796 (Efficiency PLUS)	kg/h	2.6 2.5	2.6 2.6	3.1 3.1	3.7 3.7
	6.7	Throughput (Efficiency PLUS)	t/h	118 122	141 153	172 172	196 196
	6.8.1	Energy consumption with max. throughput (Efficiency PLUS)	kWh/h	6.39 7.73	7.27 8.91	8.84 8.84	7.71 7.71
Other	8.1	Type of drive control		Impulse/AC			
	10.1	Operating pressure for attachment	bar	230			
	10.2	Oil flow for attachments	l/min	22		25	
	10.7	Sound level as per EN12053, operator's ear	dB (A)	72		78	
	10.8	Trailer coupling, model/type DIN		Bolts			
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.							

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**